
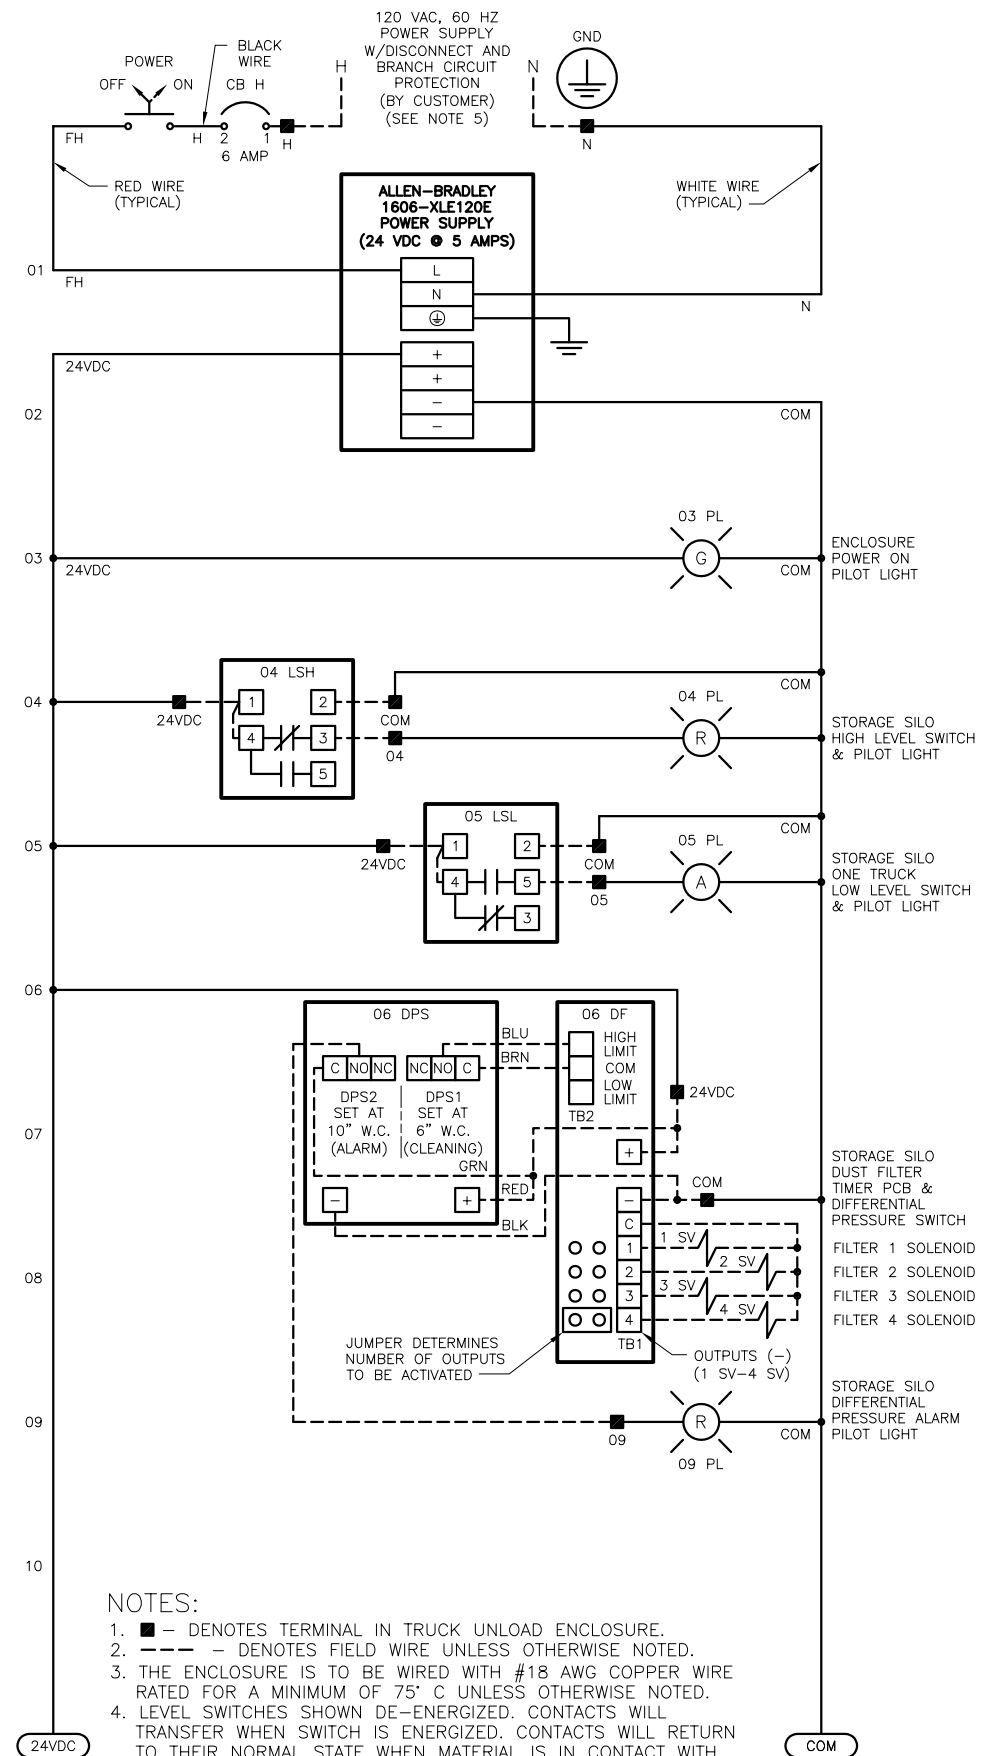
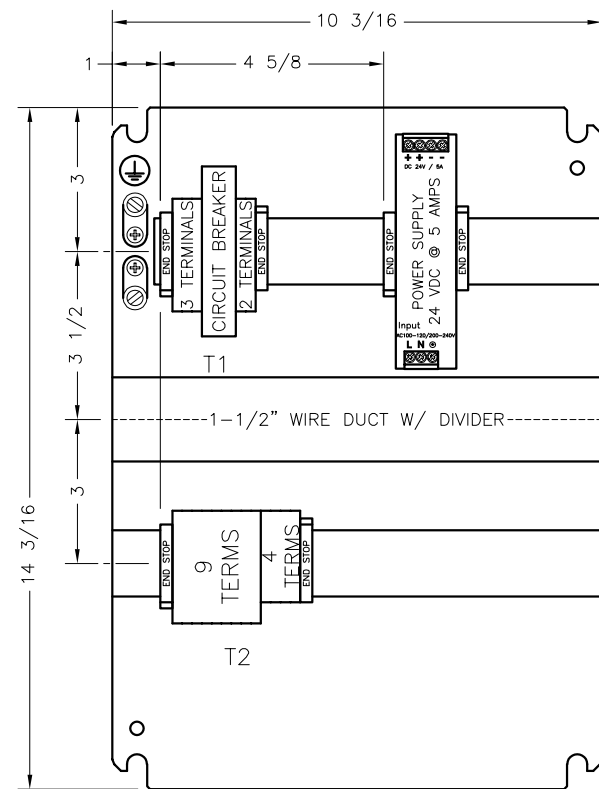
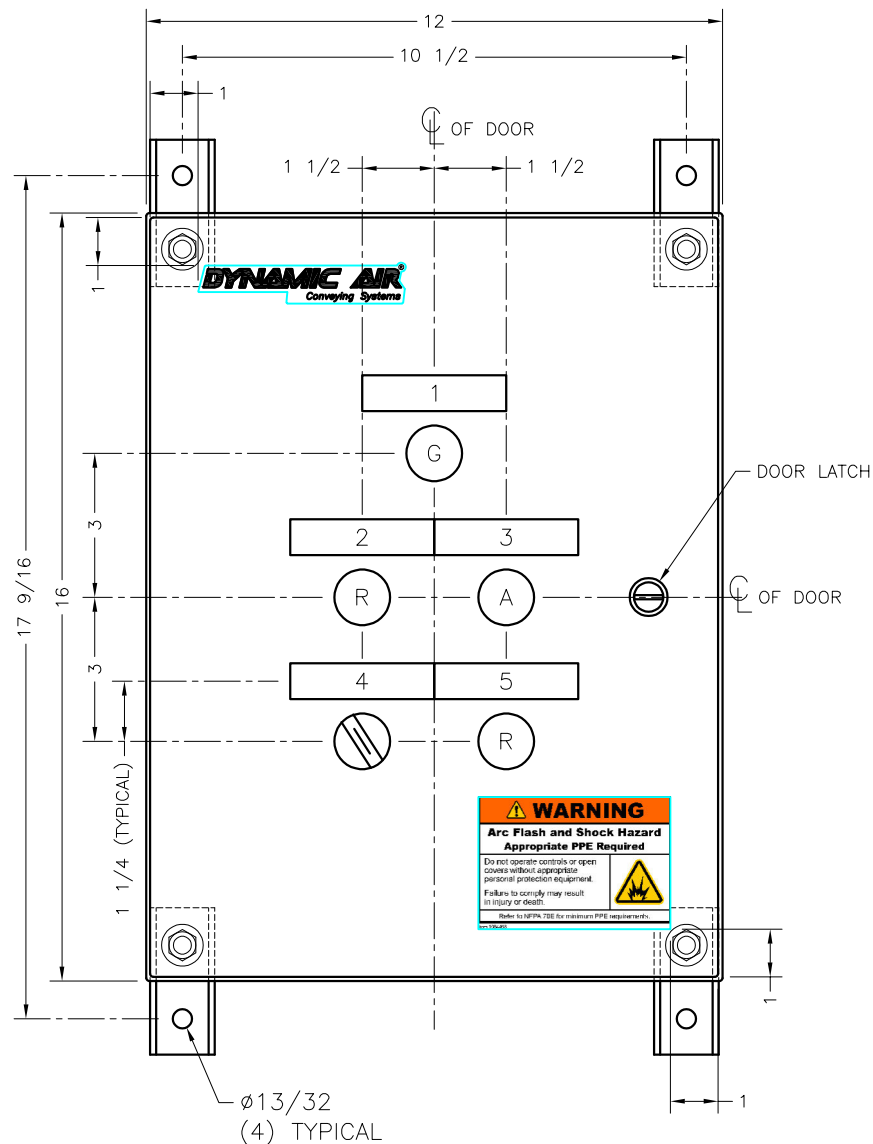



PHENOLIC DESIGNATION		
NO.	QTY.	TEXT
1	1	ENCLOSURE POWER
2	1	HIGH LEVEL SWITCH
3	1	ONE TRUCK LOW LEVEL SWITCH
4	1	POWER OFF ON
5	1	DUST FILTER HIGH DP ALARM

NOTES:

1. THE ENCLOSURE IS 8" DEEP.
2. THE ENCLOSURE IS FINISHED WITH ANSI 61 GRAY POLYESTER POWDER PAINT.
3. SEE ELECTRICAL SCHEMATIC, THIS SHEET, FOR WIRING.
4. THE MOUNTING HOLE FOR THE SELECTOR SWITCH IS TO BE 7/8" DIAMETER.
5. THE CONTROL PANEL IS TO BE UL LISTED.

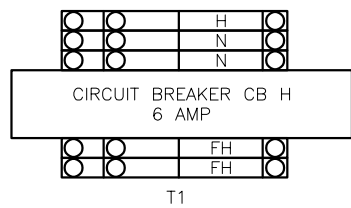

NOTES:

1. ■ - DENOTES TERMINAL IN TRUCK UNLOAD ENCLOSURE.
2. --- - DENOTES FIELD WIRE UNLESS OTHERWISE NOTED.
3. THE ENCLOSURE IS TO BE WIRED WITH #18 AWG COPPER WIRE RATED FOR A MINIMUM OF 75° C UNLESS OTHERWISE NOTED.
4. LEVEL SWITCHES SHOWN DE-ENERGIZED. CONTACTS WILL TRANSFER WHEN SWITCH IS ENERGIZED. CONTACTS WILL RETURN TO THEIR NORMAL STATE WHEN MATERIAL IS IN CONTACT WITH PROBE OR LEVEL SWITCH IS DE-ENERGIZED.
5. BRANCH CIRCUIT PROTECTION SHALL BE LISTED INSTANTANEOUS TRIP CIRCUIT BREAKER NOT EXCEEDING 24 AMPS.

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES

BY CLT		DATE 01/28/24		SCALE 3/16"=1"														TRUCK UNLOAD ENCLOSURE, TYPE 4		<div><div><div>DYNAMIC AIR</div><div>Conveying Systems</div><div>SAINT PAUL, MINNESOTA U.S.A.</div></div></div>					
GEN.		ENGR. MPX		OK														HIGH, LOW, ONE TRUCK LOW & DUST FILTER							
THIS DRAWING IS THE PROPERTY OF DYNAMIC AIR INC. WHO CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL DISCLOSED. IT IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY AND MAY NOT BE COPIED OR USED FOR MANUFACTURE OF ANYTHING SHOWN WITHOUT SPECIFIC WRITTEN PERMISSION FROM DYNAMIC AIR INC.																SYSTEM 100A									
																METROPOLITAN SEWERAGE DISTRICT									
NO.		DATE		MICRO		REVISION NOTE										APPRD		BY		ASHEVILLE, NC		SHEET	DRAWING NO.		REV.
																				P.O.# 68862		1 OF 1	B-4486-107A		

DYNAMIC AIR
Conveying Systems

SHEET 1 OF 1	DRAWING NO. B-4486-107A
-----------------	----------------------------